





STYLE : WITC-007 Description

Acrylic Diffuser Mounted on Aluminum Chassis with touch sensor light switch

www.witcinc.co /danthomas@witc.co/630.405.9252

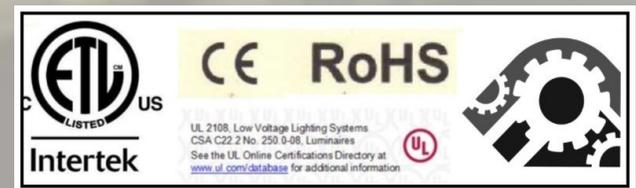

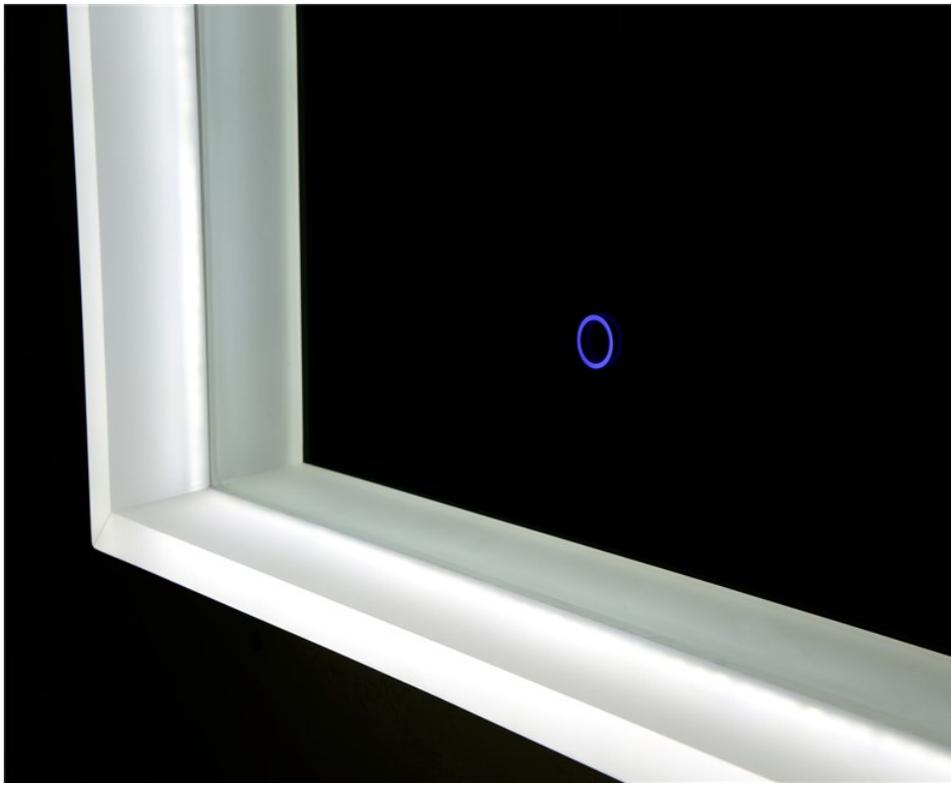

SPECIFICATION:
WITC007 - with Acrylic Diffuser Mounted on aluminum Chassis

1. Mirror: 5mm thickness copper-free mirror, ecofriendly, mirrors with round edges and round corners no straight edges;
2. Lights: IP67 water resistant CE listed LED strip smd2835 240 chips per meter IP67; color 2700K; CRI90 ETL CERTIFICATE FOR FIXTURE ; UL LISTED DRIVER CE, ROHOS COMPLIANT. CSA C22.2 NO.250.0-08 LUMINAIRE UL2108
3. Driver: UL listed, IP67 water resistant; 110V with 30" whip pig tail for hard wire or angle plug .
4. Ground wires: a ground wire on the light box and the driver have a ground wire for the junction box centered ; 30 " inch long whip or angle plug;
5. Waterproof anodized Aluminum frames and backbody.
6. Warranty: 5 year warranty electrical parts.
7. Fixture should be mounted to a sound surface. Installer should mount hardware in a solid material for proper installation.




Style WITC007 with touch sensor switch on mirror face

Style WITC007

Standard Sizes
 24x36
 36x36
 42x36
 48x36
 54x36
 Custom Sizes Available

Options.
 5 Year Warranty-
 Acrylic Diffuser Frame
 Touch Switch / Night Light
 Standard Sizes
 Custom Sizes Available

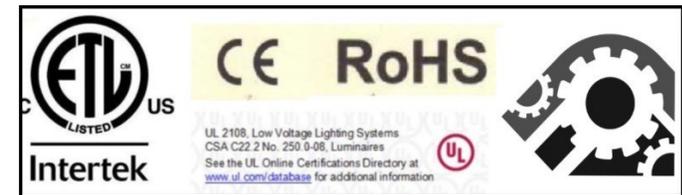

WITC Inc.
 584 Beaconsfield Ave.
 Naperville, IL 60565

www.witc.co

Style WITC007
 Contact: Dan Thomas
 PH: 630.405.9252 / danthomas@witc.co


HANGING INSTRUCTION:

WITC STYLES 007 Acrylic Diffuser Mounted on aluminum chassis with touch sensor switch on mirror.

MARK AND MEASURE LIGHT BOX ON WALL . SEE DIAGRAM PROVIDE 30" WHIP. INSERT GROUND WIRE IN GROUNDED CONNECTOR. INSERT HOT AND NEUTRAL WIRE INTO HARDWIRE. ELECTRICAL POWER SHOULD BE CONTROLLED BY A LIGHT SWITCH. FIXTURE SHOULD BE MOUNTED TO A MECHANICALLY SOUND SURFACE SUCH AS WALL STUDS TO SUPPORT ITS WEIGHT. MOUNTING HOLES ARE PROVIDED IN THE ALUMINUM BOX. A BEAD OF SILICONE APPLIED TO THE BOTTOM OF THE BOX AS NEEDED.



PUNCH OUT WITH HOLE AND SLOT ON ALUMINUM CHASSIS.
HOW TO INSTALL:
MEASURE CENTER TO CENTER, USE A LEVEL DRILL HOLES AND INSTALLER MUST SELECT MATCHING PAN HEAD SREW WITH PLASTIC SCREW TYPE ANCHOR. . 50-100 LB.

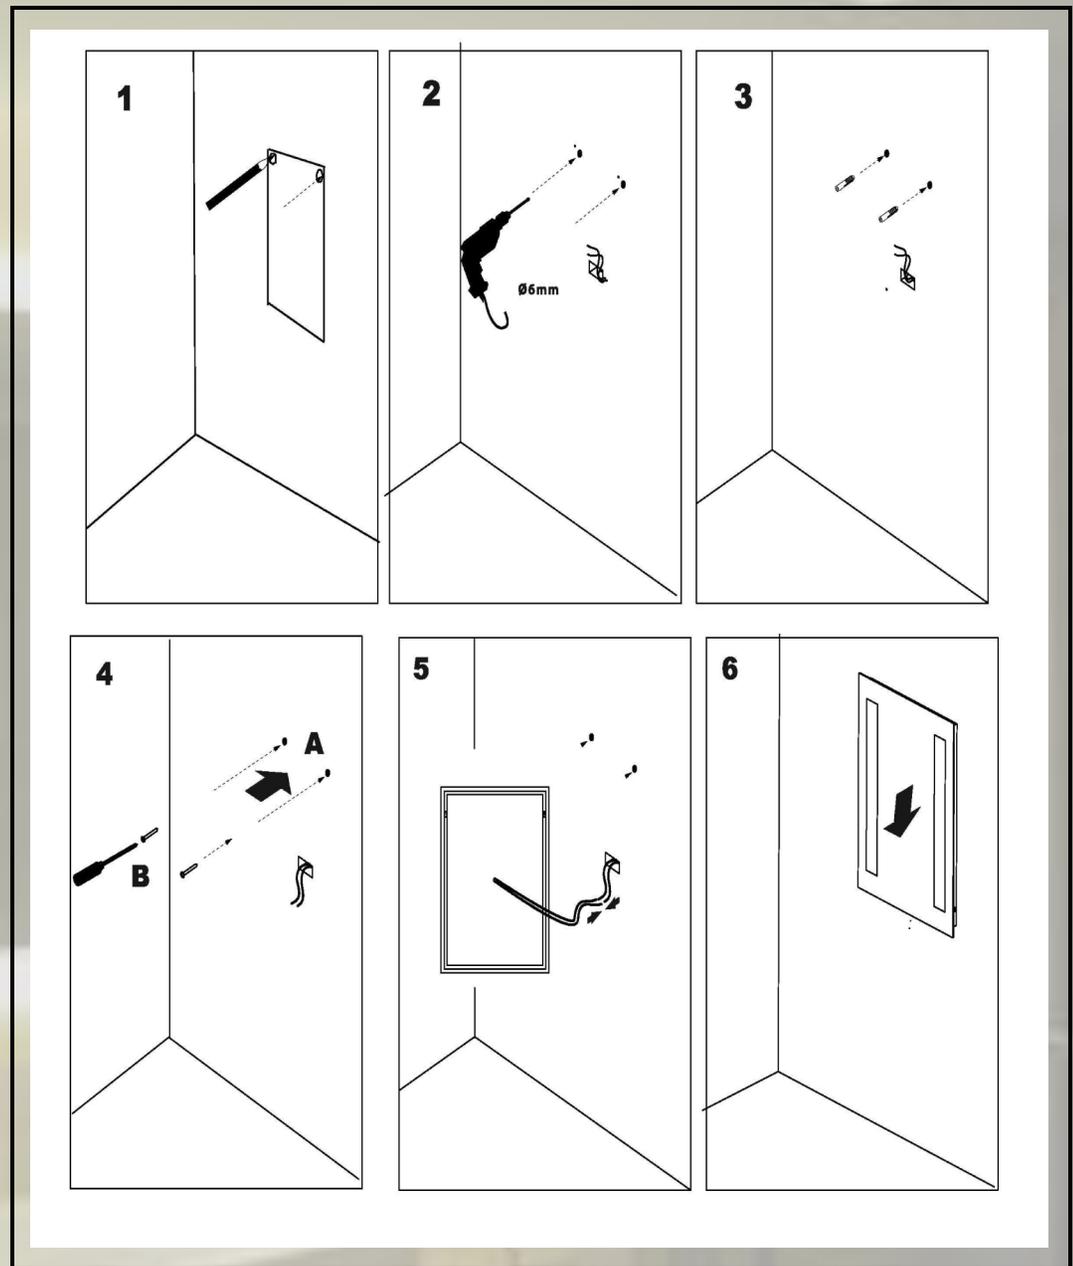


W.I.T.C. Inc.
Contact Dan Thomas

WITC STYLES
danthomas@witc.co

SPECIFICATION:

WITC007- with Acrylic Diffuser Mounted on aluminum Chassis

- 1.Mirror:5mm thickness copper-free mirror,ecofriendly, mirrors with round edges and round corners no straight edges;**
- 2.Lights: IP67 water resistant CE listed LED strip smd2835 240 chips per meter IP67;color 2700K;CRI90 ETL CERTIFICATE FOR FIXTURE ;UL LISTED DRIVER CE, ROHOS COMPLIANT.CSA C22.2 NO.250.0-08 LUMINAIRED UL2108**
- 3. Driver: UL listed, IP67 water resistant;110V with 30" whip pig tail for hard wire or angle plug .**
- 4. Ground wires: a ground wire on the light box and the driver have a ground wire for the junction box centered ;30 " inch long whip or angle plug;**
- 5.Waterproof anodized Aluminum frames and backbody.**
- 6. Warranty: 5 year warranty electrical parts.**
- 7. Fixture should be mounted to a sound surface. Installer should mount hardware in a solid material for proper installation.**

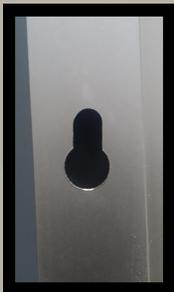

ETL ^{CM} **US**
LISTED
Intertek

CE RoHS

UL 2108, Low Voltage Lighting Systems
CSA C22.2 No. 250.0-08, Luminaires
See the UL Online Certifications Directory at
www.ul.com/database for additional information

