


STYLEWITC012 WITH ALL 4 SIDES LIGHT BAR WITH NIGHT LIGHT FEATURE WITH TOUCH SENSOR ON FACE OF MIRROR



**Standard Sizes** 

24x36


36x36

42x36


48x36

54x36

**Custom Sizes** Available










ALL 4 SIDES WITH LED LIGHT BAR








STYLE: WITC-012Description

Diffuser WITH DIRECT LIGHT TOP AND BOTTOM LEFT AND RIGHT SIDES

Standard Sizes: 24x36-36x36-42x36-48x36-54x36 CUSTOM SIZE AVAILABLE AND CUSTOM OPTION Www.witc.co/danthomas@witc.co/630.405.9252

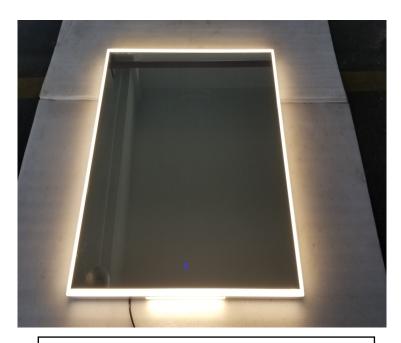

STYLEWITC012 WITH ALL 4 SIDES LIGHT BAR WITH NIGHT LIGHT FEATURE WITH TOUCH SENSOR ON FACE OF MIRROR

Style WITC012

**Standard Sizes** 

24x36

36x36

42x36

48x36

54x36

**Custom Sizes** 

Available



WITC Inc. 584 Beaconsfield Ave. Naperville, IL 60565



- 1.Mirror:5mm thickness copper-free mirror, ecofriendly, mirrors with round edges and round corners no straight edges; finger print protection for frosted areas only.

  Touch sensor dimmers to control output. Night light feature with side on/off switch.
- 2.Lights: IP67 water resistant CE listed LED strip smd2835 90-120-240 chips per meter Silicon Gel Waterproof; color 2700K-6100K;
- ETL CERTIFICATE FOR FIXTURE ;UL LISTED DRIVER
  CE, ROHOS COMPLIANT.CSA C22.2 NO.250.0-08 LUMINAIRED UL2108
- 3. Driver: UL listed, IP67 water resistant;110V
- 4. Ground wires: a ground wire on the light box and the driver have a ground wire ;30 " inch long whip with pig tail or angle plug available same cost.
- 5. Waterproof anodized Aluminum frames and backbody.
- 6. Warranty: 5 year warranty electrical, components.
- 7. Fixture should be mounted to a sound surface. Installer should mount hardware in a solid material for proper installation.







STYLEWITC012 WITH ALL 4 SIDES LIGHT BAR

WITH NIGHT LIGHT FEATURE WITH TOUCH SENSOR ON FACE OF MIRROR











Options or Upgrades for Style WITC012
Bluetooth- Digital Clock- Digital TV-RadioMirror Frames-Magnifying Mirror-Single
Dual Shaver Socket-Mirror heating pad-Infrared
Sensor Switch-

Touch Switch / Press button Switch- Night Light



Style WITC012 Contact: Dan Thomas PH:630.405.9252 /danthomas@witc.co HANGING INSTRUCTION:

WITC012- Diffusers with direct light top and

bottom left and right sides.

MEASURE SLOT TO SLOT USE PAN HEAD SCREW.
MARK AND MEASURE LIGHT BOX ON WALL. SEE
DIAGRAM PROVIDE 24" WHIP WITH PIG TAIL FOR
HARDIWRE. INSERT GROUND WIRE IN GROUNDED
CONNECTOR. INSERT HOT AND NEUTRAL WIRE INTO HARDWIRE. ELECTRICAL POWER SHOULD BE
CONTROLLED BY A LIGHT SWITCH. FIXTURE
SHOULD BE MOUNTED TO A MECHANICALLY SOUND
SURFACE SUCH AS WALL STUDS TO SUPPORT ITS
WEIGHT. MOUNTING HOLES
ARE PROVIDED IN THE ALUMINUM BOX. A BEAD OF
SILICONE APPLIED TO THE BOTTOM OF THE BOX




AS NEEDED.





PUNCH OUT WITH HOLE
AND SLOT ON ALUMINUM
CHASSIS.
HOW TO INSTALL:
MEASURE CENTER TO
CENTER, USE A LEVEL DRILL
HOLES AND
INSTALLER MUST SELECT
MATCHING PAN HEAD SREW
WITH PLASTIC SCREW TYPE
ANCHOR. 50-100 LB.

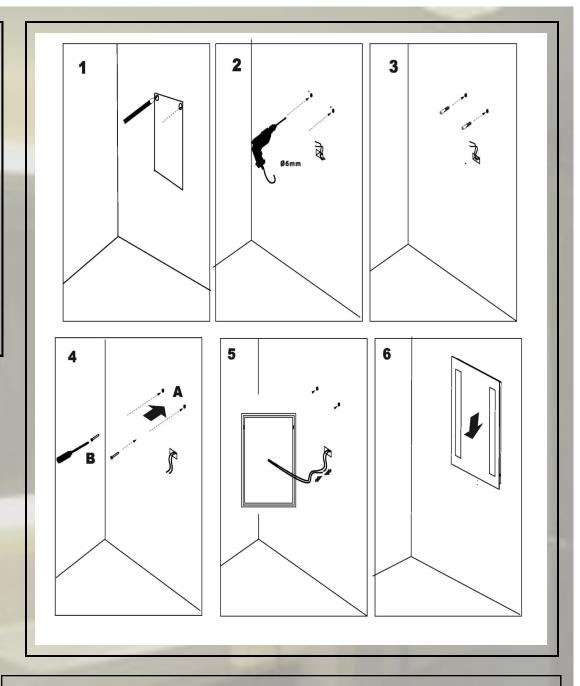

W.I.T.C. Inc.
Contact Dan Thomas

Style:WITC012 danthomas@witc.co

## SPECIFICATION WITCOLS: Diffus


WITC012; Diffuser with direct light top and bottom, left and right sides.:IP67 water resistant CE listed LED strip smd2835 90-120- 240 chip per meter

2700K-6100K. CRI90 LED LIGHT.

1.Mirror:5mm thickness copper-free mirror,ecofriendly, mirrors with round edges and round corners no straight edges;finger print protection for frosted areas only. Touch sensor dimmers to control output. Night light feature with side on/off switch.

2.Lights: IP67 water resistant CE listed LED strip smd2835 90-120-240 chips per meter Silicon Gel Waterproof; color 2700K-6100K; ETL CERTIFICATE FOR FIXTURE; UL LISTED DRIVER CE, ROHOS COMPLIANT.CSA C22.2 NO.250.0-08 LUMINAIRED UL2108


- 3. Driver: UL listed, IP67 water resistant;110V
- 4. Ground wires: a ground wire on the light box and the driver have a ground wire ;30 " inch long whip with pig tail or angle plug available same cost.
- 5. Waterproof anodized Aluminum frames and backbody.
- 6. Warranty: 5 year warranty electrical, components.
- 7. Fixture should be mounted to a sound surface. Installer should mount hardware in a solid material for proper installation.

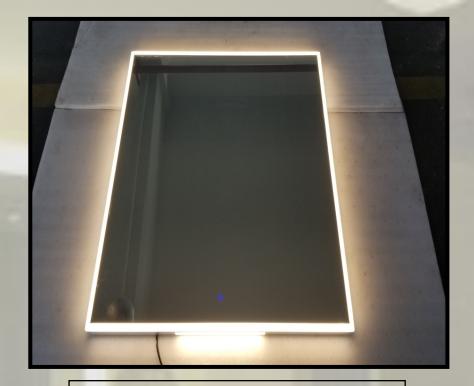


STYLEWITC012 WITH ALL 4 SIDES LIGHT BAR WITH NIGHT LIGHT FEATURE WITH TOUCH SENSOR ON FACE OF MIRROR









Diffuser on top facing out

Diffueser top and bottom facing out

Diffuser left and right facing out

Diffuser all four sides facing out











UL 2108, Low Voltage Lighting Systems
CSA C22 2 No. 250.0-08, Luminaires
See the UL Online Certifications Directory at
www.ul.com/database for additional information

